



### CIRKA-FL-Slim



LM79

LM80

#### Product Description

- ▶ High pressure die casting housing ,anti-static powder painting.
- ▶ High thermal conductive material and high efficiency cooling system.
- ▶ High efficient Cree COB ensures excellent performance.
- ▶ Quick and easy installation way for easy maintenance
- ▶ Different mout options available
- ▶ IP Rating □ IP65

#### Application


Lawn,Gymnasiums,Billboards,Bulidings,Parks,etc.



Input Power	Delivered Lumens (5000K)	ETL	DLC	LM79	Projected L70 (Hours)	Input Voltage	CCT	CRI	Power Factor	THD	Installation
20W	1,900LM	✓	Pending			120-277V 50/60HZ	2700-6500K	>75	>0.92	<15%	Knuckle or U-Bracket
30W	2,600LM	✓	Pending								
40W	3,400LM	✓									

More models and wattages will be DLC listed,please visit [www.ledcents.com](http://www.ledcents.com) to check the latest DLC status

Inch(mm)

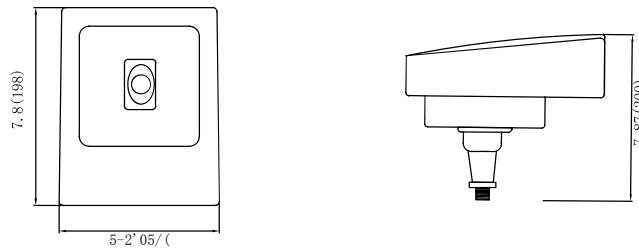

#### Distribution Curve Flux

